




RF-Short Logger System

The logging systems include the innovative PNT 9704 Weigh indicators. The CableLink Wireless System allows you to eliminate the potentially troublesome long cable from the trailer reach cable to the meter.

The load cells are machined from high-alloy steel, heat treated for maximum strength, and then tested to a 300 percent overload capacity. The sensing elements in the double-gaged steel shear-beam load cells feature full-twist compensation and are fully encapsulated to withstand the harshest environmental conditions. Accuracy 1% of net payload and easy to operate.

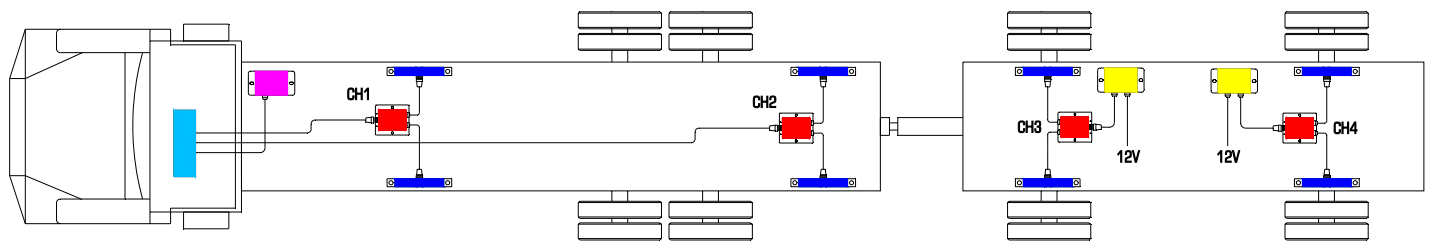

Digital Indicator Digital Transmitter Load Cells RF Transmitter RF Receiver



9704 Digital Indicator



7042 Digital Transmitter



532623 Load Cell



601 RF TX



602 RF REC

Short Logger Full System #79704RF

- (1) 9704 Indicator (4-Channel)
- (4) 7042 Transcoders
- (2) 216-35 35 ft Truck cable
- (2) 216-80 80 ft Trailer cable
- (1) 218-15 15 ft Power cable
- (8) 532623 26" Accu-Beam Load Cells
- (8) 2050 26" Load Cell Mounting Kits
- (2) 601 RF Transmitter
- (1) 602 RF Receiver

