


## ON-BOARD WEIGHING SYSTEMS

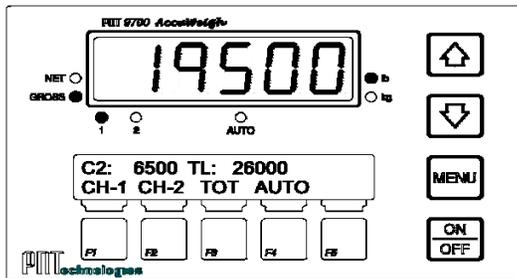

## PNT9700 User's Manual


Installation Calibration Operation

(Version 4.00)

Pacific Northwest Technologies

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.

Do not use pencils or other sharp-pointed objects to press the meter's keys.



## ON-BOARD WEIGHING SYSTEMS

*PNT 9/00 AccuWeigh*


### Contents

Chapter 1	Introduction .....	7
Chapter 2	Meter Setup .....	9
	Starting the Meter Setup .....	9
	Setting the Load Units .....	10
	Setting the Grad Size .....	11
	Setting For Net Or Gross .....	12
Chapter 3	Calibration .....	13
	Entering the Empty Weight .....	14
	Entering the Loaded Weight .....	17
	Advanced Calibration .....	20
Chapter 4	Operating the Meter .....	23
	Selecting the Weight-display Channel .....	23
	Selecting the Auto-cycle Function .....	23
	Changing the Auto-cycle Speed .....	24
	Recalling the Tare Weight .....	25
	Recording the Cal Factor .....	26
Chapter 5	Troubleshooting .....	31
Chapter 6	Test Mode .....	37
	Recording Test Numbers .....	38
Chapter 7	Installation .....	41
	Installing the Meter .....	41
	Mounting the Transmitters .....	42
	Routing the Signal cables .....	42
	Routing the Power Cable .....	43
	Connecting the Cables .....	43
	Final Step .....	44

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

Chapter 8	Maintenance .....	45
	Daily Inspections .....	45
	Weekly Inspections .....	45
Chapter 9	Special Operations .....	47
	Entering the Weight-to-go Limits .....	47
	Setting For Weight-to-go .....	51
	Setting the Transmitter Model .....	52
Chapter 10	Using Multiple Trailers .....	55
	Enabling the 2-channel ID Number .....	55
	Set 2-channel ID Number .....	56

Do not use pencils or other sharp-pointed objects to press the meter's keys.



## ON-BOARD WEIGHING SYSTEMS

### PNT 9700 AccuWeigh

The PNT 9700 AccuWeigh digital on-board weighing system consists of a digital meter, load cells, transmitters, and cables designed for logging trucks. The meter is optimized to be used with PNTechnologies transmitters and cables but will also function with other equipment.

Benefits of using the PNT 9700 include:

- Flexibility to read individual axle weights
- A reliable two-wire hookup between the transmitters and the meter
- An extremely bright weight display, visible even in bright sunlight
- Ability to calibrate the meter without having to have the truck loaded
- A unique load-hold feature, useful when loading at several different sites
- Measurements in increments of 10, 20, 50, or 100 pounds or kilograms
- Internal software that can be updated to include the latest enhancements.

A modern on-board weighing systems consists of load cells to sense the load's weight, transmitters and cables to send the load-cell output to the meter, and a meter to change the signals into information usable by the operator.

**Load cells** are precision-machined high-strength steel beams with strain gages bonded inside. The load cell is installed on the truck between the log load and the truck frame. When the logs are loaded on the truck, the strain gages sense the weight of the logs and send a small electrical signal to the meter by way of the transmitter.



The **transmitter** provides the voltage to the load cell to power the strain gages. A signal voltage from the load cell is returned to the transmitter where it is converted to a digital signal before being sent to the PN9700 meter through the two-wire cable.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

The **PNT 9700 meter** receives the digital signal from the transmitter and interprets and displays it as a weight in pounds or kilograms. Two displays are used on the front of the meter. The top LED display shows the weight of the load and can easily be switched between truck, trailer, or total weight. The lower dot-matrix information display complements the top display by showing the two non-displayed weights. For example, if the top LED display is set to show the truck weight, the upper line of the information display will show the trailer weight and the total weight.

When the meter is in either the calibration or setup modes, the upper line of the information display will show a calibration or setup message. The lower line will show the appropriate legend for the blue "soft" keys, F1 through F5. The function of each of these keys changes depending on the mode that the PNT 9700 is in. The labels will change as various menus are selected during calibration or setup. During normal operation, the keys will select:

CH-1	[F1]	Channel 1 or truck weight
CH-2	[F2]	Channel 2 or trailer weight
TOT	[F3]	Total weight
AUTO	[F4]	Autocycle between Ch 1, Ch 2, and Total

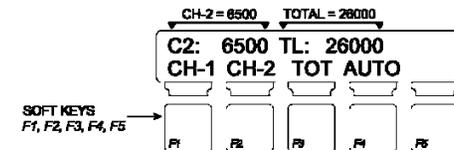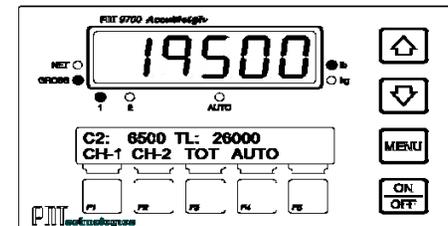

Do not use pencils or other sharp-pointed objects to press the meter's keys.

---

## CHAPTER 1 INTRODUCTION

The PNT 9700 meter has two menus used for setup and calibration, the FUNCTION MENU and the SETUP MENU.

The FUNCTION MENU is used to:

- reset the empty weight
- select a gross or net weight mode
- select the preferred speed for the auto-cycle mode
- enable or disable the load-hold feature
- determine load-cell test numbers
- recall the tare weight
- record the test numbers
- enable the meter for weight-to-go feature

The SETUP MENU is used to:

- calibrate channel 1 or 2
- enable the advanced calibration feature
- select the different weight increments, commonly called the grad size
- select the proper weight unit, such as pounds or kilograms
- record the cal factor
- enter the weight-to-go limits

The ADVANCED SETUP MENU is used to:

- enter the transmitter model
- set the meter for multiple trailers

The following chapters guide you through the setup and calibration of the meter. If a key on the right-hand side of the meter needs to be pressed, a small drawing of the key will be shown, like this: 

Messages displayed in the upper line of the information display will be shown in the format as they would be seen in the window and will be shown on the right-hand side of the page, like the example to the right of this paragraph.




---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

The labels for the five blue soft keys along the bottom of the meter will be shown similarly in the bottom line of the information display, immediately above the key, like the example to the right of this paragraph.




---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 2 METER SETUP

### INTRODUCTION

This chapter will guide you through the meter setup prior to doing the calibration. Questions to ask yourself are:

1. Will you want the weight display to show in pounds (lbs) or kilograms (kgs)?
2. Do you want the weight shown in 10, 20, 50, or 100 lbs or kgs increments (grad size)? Selecting 10 or 20 will give better resolution but the display will appear unstable because the numbers will fluctuate more frequently when the truck slightly moves. A grad size of 50 is a good all-around selection.
3. Should the weights be shown as gross weight or net weight? Most operators want the display to show gross weight so they can see the same weight that any roadside platform scale or mill scale would see.

### STARTING THE METER SETUP

Turn on the meter by firmly pressing the  key. The information display will first show **POWER ON** and then show the meter model and the software version. During this time, the meter is also performing an internal self test which includes briefly lighting all of the small red indicator lights. If the information display shows any error messages, refer to Chapter 5, *Troubleshooting*.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.


### SETTING THE LOAD UNITS (LB OR KG)

It is important to see if the meter is displaying weights in kilograms (kg) or pounds (lb). Look at which of the small red LED lamps is on at the right of the weight display, next to the **lb** or **kg** label. If not correct, do the following:

1. Press the  key for 5 seconds until the information display shows



- After releasing the  key, the information display will show



2. Press the  or  key to select the UNITS menu.



3. Press the  or  key to select the desired unit.

4. Press the  key to store the change.

5. When finished, press the key  to exit the **SETUP MENU**.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

**SETTING THE GRAD SIZE**

The grad size, or graduation, allows the meter to display the load weight in either 10, 20, 50, or 100 lb or kg increments.

1. Press the **MENU** key for 5 seconds until the information display shows



After releasing the **MENU** key, the information display will show



2. Press the **Up** or **Down** key to select the **GRAD SIZE** menu.



3. If no change is desired, press the **NO** key.

4. If you want to change the grad size, press the **YES** key, followed by the **ENTER** key.

5. Press the **Up** or **Down** key to select a grad size: 10, 20, 50, or 100.

6. Press the **ENTER** key to store the change. Press the **CANCEL** key to exit the **SETUP MENU**.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

**SETTING FOR NET OR GROSS**

The **NET** weight refers to the weight of the load; it does not include the weight of the truck and/or trailer. **GROSS** weight, however, refers to the weight of both the load and the truck/trailer combination. Look at which of the small red LED lamps is on at the left of the weight display, next to the **NET** or **GROSS** label. If not correct, do following:

1. Press the **MENU** key to get the



If you do not continue with the operation within 15 seconds, the meter will reset to the normal weighing mode and you will need to press the **MENU** key again.

2. The information display will show



3. Press the **MENU** key again to show



4. Press the **GROSS** key to select **GROSS WEIGHT**. The red **GROSS** LED lamp will turn on.

5. Press the **NET** key to select **NET WEIGHT**. The red **NET** LED lamp will turn on.

6. Press the **CANCEL** key to exit the **SETUP MENU**.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 3 CALIBRATION

### INTRODUCTION

The calibration process allows you to fine tune your weighing system to provide the greatest degree of accuracy. The accuracy of the PNT 9700 AccuWeigh, however, depends on the accuracy of the information you provide. You will be required to have the weights of your truck and trailer when they are empty (tare weight) and when they are loaded (gross weight).

Find a certified platform scale of known accuracy, such as a state-operated weight-enforcement highway scale or a mill scale. Have your empty log truck and trailer weighed with the trailer down. Get the truck weight (including the steer axle and the drive axles) and the trailer weight. For future reference, record the weights here:

Truck (steer and drive axles): \_\_\_\_\_ LB KG

Trailer (trailer axles): \_\_\_\_\_ LB KG

Total weight: \_\_\_\_\_ LB KG

Not all platform scales read the same, so try to use the same scales whenever you need to recalibrate the meter or check the calibration. Use the same scales for recording loaded weights that you used for getting your empty weights.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck


### ENTERING THE EMPTY WEIGHT INTO THE METER

Before entering the empty weights into the meter, make sure the meter display is set to **GROSS** (refer to Chapter 1, *Setting For Net Or Gross Weight*). Also, make sure the truck and trailer are empty and the trailer is on the ground with the meter cable connected.

1. Press the  key for 5 seconds until the information display shows



2. After releasing the  key, the information display will show



and the weight display will show



3. To enter the truck empty weight, press the  or  key until the information display shows



4. Press the  key.

The information display will briefly (for about 4 seconds) show



It will then show



Do not use pencils or other sharp-pointed objects to press the meter's keys.

5. The last number of the weight display will be flashing, telling you that number is ready to be changed.

To change the number's value, press the  or  key.

To select a different number, press the  or  key.

6. When the number on the weight display matches your truck

(channel 1) empty weight, press the  key to store the

weight in the meter's memory.

The information display will briefly show 

and then return to




and the weight display will show



7. To enter the trailer empty weight,

press the  or  key until the information display shows



8. Press the  key. The information

display will briefly show



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

It will then show



9. The last number of the weight display will be flashing, telling you that number is ready to be changed.

To change the number's value, press the  or  key.

To select a different number, press the  or  key.


10. When the number on the weight display matches your trailer

(channel 2) empty weight, press the  key to store the weight in the meter's memory.

The information display will show



then return to



11. At any time, you can exit the calibration process by pressing

the  key.

The information display will briefly show



Do not use pencils or other sharp-pointed objects to press the meter's keys.

**ENTERING THE LOADED WEIGHT INTO THE METER**


The following steps can be completed only after having your loaded truck weighed at a certified and accurate platform scale. The accuracy of your meter will completely depend upon the accuracy of the platform scale. For best results, use the same scales you used for getting your empty weights.

The steps involved are similar to those used for entering the empty weights.

1. Press the  key for 5 seconds until the information display shows



2. After releasing the  key, the information display will show



and the weight display will show




3. To enter the truck's loaded weight, press the  or  key until the information display shows



4. Press the  key. The information display will briefly show



It will then show



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

5. The last number of the weight display will be flashing, telling you that number is ready to be changed.

To change the number's value, press the  or  key.


To select a different number, press the  or  key.

6. When the number on the weight display matches your truck

(channel 1) loaded weight, press the  key to store the weight in the meter's memory.

The information display will briefly show

and then return to



and the weight display will show



7. To enter the trailer's loaded weight, press the  or  key until the information display shows



8. Press the  key.

The information display will briefly show

Do not use pencils or other sharp-pointed objects to press the meter's keys.

It will then show



9. The last number of the weight display will be flashing, telling you that number is ready to be changed.

To change the number's value, press the or key.

To select a different number, press the or key.

10. When the number on the weight display matches your trailer's

(channel 2) loaded weight, press the key to store the weight in the meter's memory.

The information display will show



then return to



11. At any time, you can exit the calibration process by pressing

the key.

The information display will briefly show



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

ADVANCED CALIBRATION

Another way to enter the loaded weight into the meter is with the **advanced calibration** feature. This method allows the calibration of several trucks to be centrally controlled. The driver does not have to enter the setup mode of the meter, even for calibration. After setting in the tare weight, the driver need only record two sets of numbers:


1. the truck and trailer loaded weight shown by the platform scale, and
2. the channel 1 and channel 2 weights recorded on the PNT9700 while the truck is on the platform scale.

The following steps are used for the advanced calibration, which can be done on an empty truck, if necessary.

1. Press the key for 5 seconds until the information display shows




After releasing the key, the information display will show



and the weight display will show



2. Press the or key until the information display shows



3. Select the channel to calibrate by pressing

the key or the key.

For this example, we will assume you selected



Do not use pencils or other sharp-pointed objects to press the meter's keys.

4. Enter the number that was earlier recorded as the number shown on the meter's weight display for channel 1 while sitting on the platform scale. Change the numbers in the same manner as then setting the original loaded-weight calibration (shown in the

previous section of this chapter). Press the  key when completed.

5. The information display will show



6. Enter the number that was earlier recorded as the legal truck weight from the platform scale. Change the numbers in the same manner as in Step 4, above.

Press the  when completed.

7. The information display will show



Press the  key to return to normal operation.

---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.

---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 4 OPERATING THE METER

### INTRODUCTION

Now that the meter is set up and calibrated, it will continuously monitor the truck's load. The operator can lock the weight display to always show the truck or trailer weight or the total weight while viewing the other two channels in the information-display window. Auto-cycling can also be selected to continuously and automatically switch the weight display between the three channels.

### SELECTING THE WEIGHT DISPLAY CHANNEL

1. Press the  key to have the red

LED weight-display window show the channel 1 weight. The information display will show the weight for channel 2 and the total weight.



2. Pressing the  key or the  key will similarly change


both displays.

### SELECTING THE AUTO-CYCLE FUNCTION

The auto-cycle function lets the meter continuously change the weight display from the channel 1 weight to the channel 2 weight to the the total weight, then repeats the cycle

1. Press the  key to continuously

cycle the weight display through the three channels.



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

## 24 OPERATING THE METER


2. The weight-display window will momentarily show



then switch to the appropriate weight. The red LED lamp labeled **AUTO** will turn on and the LED lamps labeled **1** and **2** will alternately turn on, depending on which channel is being displayed.

3. To leave the **AUTO CYCLE** function, press either the   or  key.

The weight display will then show whichever channel you selected and the information display will show the other two weights.



### CHANGING THE AUTO-CYCLE SPEED

The time that the meter dwells on each channel display when in auto cycle can be selected by the operator. Three times are available:

SLOW	10 seconds
MID	6 seconds
FAST	3 seconds

1. Press the  to get the



If you do not continue with the operation within 15 seconds, the meter will reset to the normal weighing mode and you will need to press the  key again.

2. The information display will show



3. Press the  key two more times

and the information display will show



Do not use pencils or other sharp-pointed objects to press the meter's keys.

- Press the appropriate key to select the desired time.

- Press the  key if you decide not to change the time. If no keys are pressed within 15 seconds, the meter will return to normal operation.

RECALLING THE TARE WEIGHT

During normal day-to-day operations, one or both of the channels may slightly drift from the originally-set empty-weight (tare-weight) calibration. Various reasons can explain a small drift, for example:

- large changes in outdoor temperature from morning to mid-day,
- dropping a log on the front or rear bunks,
- mud or snow accumulations.

To recall the tare weight, perform the following steps:

- Press the  key to get the .  
If you do not continue with the operation within 15 seconds, the meter will reset to the normal weighing mode and you will need to press the  key again.

- The information display will show .

Select the appropriate channel by pressing the  key or the  key. The meter will return to the previously set tare weight for the channel selected and will be ready for normal operation.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

- An error message may be shown for 5 seconds in the information display if the tare weight of channel 1, for example, has drifted more than 3000 lbs



or 2500 kgs.



The display will change to show



and the weight display will return to the tare weight shown before the attempted change.

RECORDING THE CAL FACTOR

The cal factor is a number related to the calibration of each channel of the meter. Should you need to change meters, using the cal factor will considerably speed the process. By entering into the new meter the cal factors from the old meter, the new meter will have the same calibration. Use the space below to record your meter's cal factor.

Truck (channel 1) cal factor \_\_\_\_\_

Trailer (channel 2) cal factor \_\_\_\_\_

- Press and hold the  key

about 5 seconds until the information display shows



- After releasing the  key,

the information display will show



Do not use pencils or other sharp-pointed objects to press the meter's keys.

and the weight display will show



- To find the cal factor for the truck (channel 1) channel, press the

or key until the

information display shows



- Press the key.

The information display will show



- The last number of the weight display will be flashing, telling you that number is ready to be changed. If you are only recording the number and not changing it, record it on the previous page and

then press the key.

- If you are installing a replacement meter and want to enter the truck (channel 1) channel cal factor from the previous meter,

press or to select the number for changing.

- When the number on the weight display matches your truck

(channel 1) cal factor, press the key to store the cal factor in the meter's memory.

The information display will show



and then return to



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

and the weight display will show



- To find the cal factor for the trailer (channel 2) channel,

press the or key

until the information display shows



- Press the key.

The information display will show



- The last number of the weight display will be flashing, telling you that number is ready to be changed. If you are only recording the number and not changing it, record it on the previous page

and then press the key.

- If you are installing a replacement meter and want to enter the trailer (channel 2) channel cal factor from the previous meter

press or key to select the number for changing.

- To change the value of the number, press or key

- When the number on the weight display matches your trailer

(channel 2) cal factor, press the key to store the cal factor in the meter's memory.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

After recording or resetting the cal factor numbers, press

the  key.

The information display will briefly show



and then return to normal operation.

---

Unplug the connector from the back of the meter before jump-starting,  
battery-charging, or welding on the truck

---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

---

**CHAPTER 5 TROUBLESHOOTING**

Troubleshooting is a systematic process of testing, identifying, and eliminating areas of the weighing system that are causing problems or malfunctions. The PNT9700 is designed to aid in troubleshooting by providing error codes which identify problems. Many of the error codes will show either channel 1, the truck channel, or channel 2, the trailer channel, whichever is applicable.

The PNT9700 system has two wires going from each transmitter to their respective load cells. One wire has a red band next to the load-cell connector and is called the **red side** and the plain black wire, to the other load cell, is called the **black side**. The PNT9700 will sometimes refer to the **red side** or the **black side** in the error messages.

An effective and easy troubleshooting method is called substitution. For example, if the error message says the red side is defective, swap the red and black wires at the load cells. If the error message remains the same, then the trouble is with the wire. If the message changes to say the black side is defective, then the load cell is the problem. The same idea can be used with the channel 1 and channel 2 wires at the back of the meter.

The weight display will show  if there is a problem with channel 1 or,

if channel 2 is not working,  will be displayed.

Additional details to aid in troubleshooting will be shown in the information display window.

The following sections will show how the error codes are displayed, list the possible causes, and some troubleshooting hints.

---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

Ch.1 Red side defective			
CH-1	CH-2	TOT	CANCEL

*The red-banded wire may be damaged between the load cell and the channel 1 transmitter.*

- The load cell connected to the red-banded wire of channel 1 may be defective.
- Swap the two load-cell cables. If the message is the same, the red-banded wire is damaged, possibly pinched or cut. If the message changes to say the black side is defective, then the load cell is the problem.

Ch.1 Blk side defective			
CH-1	CH-2	TOT	CANCEL

*The black wire may be damaged between the load cell and the channel 1 transmitter.*

- The load cell connected to the black wire of channel 1 may be defective.
- Swap the two load-cell cables. If the message is the same, the black wire is damaged, possibly pinched or cut. If the message changes to say the red side is defective, then the load cell is the problem.

Ch.2 Red side defective			
CH-1	CH-2	TOT	CANCEL

*These two are the same as the channel 1 examples above except they apply to channel 2.*

Ch.2 Blk side defective			
CH-1	CH-2	TOT	CANCEL

---


Do not use pencils or other sharp-pointed objects to press the meter's keys.



*Channel 1 is not connected to its transmitter.*

- a. The channel 1 wire may have been disconnected at the back of the meter.
- b. The channel 1 wire may be damaged between the channel 1 transmitter and the meter. Disconnect the channel 1 wires from the meter. Connect the channel 2 \* wires to the channel 1 terminals. If the message stays the same, the meter is defective. If the message goes away and channel 1 works again, then the wire is the problem. Check for a cut wire or a connector unplugged.


*\* Assuming channel 2 is working.*



*Channel 2 is not connected to its transmitter.*

- a. The channel 2 wire may have been disconnected at the back of the meter.
- b. The channel 2 wire may be damaged between the channel 2 transmitter and the meter. Disconnect the channel 2 wires from the meter. Connect the channel 1 \* wires to the channel 2 terminals. If the message stays the same, the meter is defective. If the message goes away and channel 2 works again, then the wire is the problem. Check for a cut wire or a connector unplugged.


*\* Assuming channel 1 is working.*



*The difference between the original empty weight and the current empty weight is too large for the RECALL EMPTY WEIGHT command to function. The difference is limited to 3000 lbs or 2500 kgs.*


- Check for other problems, such as:
- a. bent or distorted load cell
  - b. damaged load-cell mounting
  - c. bent truck or trailer frame
  - d. defective load cell

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck




*The channel 1 wires are shorted together or shorted to the truck frame.*

- a. Disconnect the channel 1 wires from the back of the meter. If the error message remains, the meter is defective. If the message goes away, check the channel 1 wire.
- b. The channel 1 wires may be damaged between the load cell and the transmitter or between the transmitter and the meter.
- c. Check all wires for cuts or for pinched areas.
- d. Check for worn insulation where the wire could be shorted to the truck or trailer frame.



*The channel 2 wires are shorted together or shorted to the truck frame.*


- a. Disconnect the channel 2 wires from the back of the meter. If the error message remains, the meter is defective. If the message goes away, check the channel 2 wire.
- b. The channel 2 wires may be damaged between the load cell and the transmitter or between the transmitter and the meter.
- c. Check all wires for cuts or for pinched areas.
- d. Check for worn insulation where the wire could be shorted to the truck or trailer frame.



*The signal from the channel 1 transmitter is not being received at the meter.*

- a. Disconnect the black and white channel 1 wires from the back of the meter. Move the black and white channel 2\* wires from channel 2 to the channel 1 terminals. If the error message remains, then the meter is defective.
- b. If the error message goes away and channel 1 again works, check for a cut wire between the meter and the channel 1 transmitter. Check also for a good connection at the channel 1 transmitter.


Do not use pencils or other sharp-pointed objects to press the meter's keys.



*The signal from the channel 2 transmitter is not being received at the meter.*

- a. Disconnect the black and white channel 2 wires from the back of the meter. Move the black and white channel 1\* wires from channel 1 to the channel 2 terminals. If the error message remains, then the meter is defective.
- b. If the error message goes away and channel 2 again works, check for a cut wire between the meter and the channel 2 transmitter. Check also for a good connection at the channel 2 transmitter


*\* Assuming channel 1 is working.*



*The quality of the signal from the channel 1 transmitter is poor.*

- a. Disconnect the channel 1 wires from the back of the meter. Move the channel 2\* wires from the channel 2 terminals to the channel 1 terminals. If the error message remains, then check the voltage at the power cable. It should be between 11.5 and 16 volts.
- b. If the voltage is good, then make sure the power lead is connected directly to the battery. Power from any other source may be too "noisy".
- c. If the error message still remains, then the meter may be defective.
- d. If the message is gone when the channel 2 wires are substituted for channel 1, then the channel 1 transmitter is defective or the connector may not be plugged in correctly.

*\* Assuming channel 2 is working*




*The quality of the signal from the channel 2 transmitter is poor.*

- a. Disconnect the channel 2 wires from the back of the meter. Move the channel 1\* wires from the channel 1 terminals to the channel 2 terminals. If the error message remains, then check the voltage at the power cable. It should be between 11.5 and 16 volts.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

- b. If the voltage is good, then make sure the power lead is connected directly to the battery. Power from any other source may be too "noisy".
- c. If the error message still remains, then the meter may be defective.
- d. If the message is gone when the channel 1 wires are substituted for channel 2, then the channel 2 transmitter is defective or the connector may not be plugged in correctly.

*\* Assuming channel 1 is working*



*The power voltage to the meter from the battery is less than 11 volts or greater than 16 volts.*

- a. Make sure the power cable is adequately connected at the terminal strip on the back of the meter.
- b. Measure the voltage at the power cable at the back of the meter. It should be between 11 volts and 16 volts. If not, measure the voltage where the power cable is connected to the battery. If the voltage is greater than 16 volts, check the charging system of the truck.
- c. Make sure the power-cable connections at the battery are clean and tight. The cable must be connected directly to the batteries and not to an accessory, ignition, or other connection in the dash.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 6 TEST MODE

### INTRODUCTION

Test numbers provide a way to verify that your system's load cells are working as they should. Since the test number is related to the actual output of the load cell, it will also give you a warning of impending load-cell failure. With a properly working system, the test numbers for all the load cells should be similar. Load cells that are perfectly balanced (meaning no offset) will have test numbers very close to 32,767 when the truck is unloaded. Many load cells are not perfectly balanced, however, which means the test numbers will be someplace between 25,000 and 39,000. If you record a test number outside of the 25,000 to 39,000 range, the load cell has an abnormal offset and may be ready to fail.

As the truck is loaded, the test numbers should increase proportionately. For example, suppose the channel 1 test numbers were 32,546 (black) and 33,275 (red) when the truck was empty. When loaded, the test numbers should increase and the test number for the red load cell should still be slightly larger than the black load cell test number.

If you notice one of the test numbers slowly increasing or decreasing but the load is stable, that load cell output may be drifting and the load cell may be failing. Another sign of impending failure would be if one of the test numbers increases much greater or less than the other for that channel.

The following steps will show you how to get test numbers for each load cell. If your system is working properly, record the empty-weight test numbers for future reference. If you change load cells, be sure to change the appropriate test number.

Channel 1      Red = \_\_\_\_\_      Black = \_\_\_\_\_

Channel 2      Red = \_\_\_\_\_      Black = \_\_\_\_\_

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.

### RECORDING TEST NUMBERS

1. Press the  key to get the



If you do not continue with the operation within 15 seconds, the meter will reset to the normal

weighing mode and you will need to press the  key again.

2. The information display will show



3. Press the  key again to show



4. Press  key to select the test mode.

The display will briefly show



The weight display will show




during all of the following steps.

5. Press the  key to display the

channel 1 test numbers. The numbers shown here are examples only. Your test numbers will be different.

Record your test numbers in the space provided on the first page of this chapter.



Do not use pencils or other sharp-pointed objects to press the meter's keys.

6. Press the  key to display the

channel 2 test numbers.  
The numbers shown here are examples only. Your test numbers will be different.  
Record your test numbers in the space provided on the first page of this chapter.



7. Press the  key to return to the normal weighing mode.

The display will briefly show



---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

---

## **CHAPTER 7    INSTALLATION**

### **INTRODUCTION**

The PNT 9700 meter system includes the meter, two transmitters with cables to connect to the load cells, one single-piece cable for the truck (channel 1), a two-piece cable for the trailer (channel 2), and a power cable. Items to be supplied by the operator include a plug and socket for the trailer (channel 2) cable, mounting hardware for the meter and transmitters, and an inline fuse holder with a 3-amp slow-blow fuse.

Before starting the installation, tape over the ends of the connectors to keep them free of dirt and grease. Small plastic bags, like sandwich bags, could also be used for protection.

Plan the location of the meter to minimize exposure to direct sunlight on the meter face. Even though the weight display has super-bright numbers, direct sunlight makes them more difficult to view.

The transmitters should be mounted in a location protected from road debris and sticks and branches. The typical mounting areas are inside the frame rails or on the back-side of a crossmember. Remember to keep cable loops to a minimum to avoid having them snagged on debris or tools.

### **INSTALLING THE METER**

1. Find a suitable location where the meter will be convenient to the operator.
2. Remove the U-bracket from the meter and use it as a template to mark the drilling locations for the four mounting screws.
3. Use four #10 or #12 screws to mount the U-bracket.
4. Install the meter back into the U-bracket and verify that the meter is in a desirable location.
5. Unplug the cable connector from the back of the meter by pulling straight away from the meter back. Set next to the meter for later installation.

---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

---

### **MOUNTING THE TRANSMITTERS**

1. Find a protected location for each transmitter. Drill two 5/16" or 8 mm mounting holes for each transmitter.
2. Install the transmitters so the cable connector is easily accessible and is pointed in the direction the cable will go to the meter.
3. Do not let the load-cell cables get sharply kinked where they come out of the transmitter.

### **ROUTING THE SIGNAL CABLES**

1. Route the two cables from the truck (channel 1) transmitter to the two truck load cells. Note which load cell (left or right) has the red-banded cable. Secure the cables with nylon cable ties or tape so the cables are protected and exposed loops are minimized.
2. Similarly route and secure the two cables from the trailer (channel 2) transmitter. As an aid in troubleshooting, connect the red-banded cable to the same side as on the truck.
3. Check the load cell and cable connectors to be sure they are free of dirt, grease, and moisture.
4. Plug the cables into the load cells and tighten the connectors until resistance is felt. Tighten the connectors an additional 1/4 turn using only your fingers; pliers are not necessary. The additional tightening will seat the weather-proofing O-ring that is inside the cable connectors.
5. Route the truck (channel 1) cable from the transmitter to the meter. Wherever the cable passes through a body panel, such as floor, toe-board, or firewall, provide protection for the cable to prevent chafing. At the meter, put a tag on the cable to identify it as channel 1.
6. Next, route the cable from the trailer (channel 2) transmitter to the front of the trailer and locate a place for the trailer half of the cable connector. Install the cable on the connector and fasten the connector to the trailer.
7. Install the other half of the connector on the forward portion of the cable and route the cable into the cab for connection to the meter. Observe the same precautions as in step 5, above. Identify the cable as channel 2.

---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

- Secure the cables in the cab, next to the meter, and cut them to the proper length for connection to the meter. Be sure and maintain the channel identification.

**ROUTING THE POWER CABLE**

- The power cable must be connected directly to the batteries. **DO NOT** connect to an accessory terminal on the ignition switch, fuse panel, or behind the dash. The meter must have a "clean" source of 12 volts.
- Route the power cable from the batteries to the meter. **DO NOT** connect to the batteries yet.
- Observe the previous precautions about protecting the cable from undo chafing and abrasion.

**CONNECTING THE CABLES**

- Carefully cut back 1 inch of the outer insulation on the meter end of each cable. Do not cut into the white or black insulation of the signal wires or the red or black insulation of the power cable.
- Strip off 1/4 inch of the individual wire insulation.
- Install the wires into the green meter connector and snugly tighten each terminal. Use Figure 7-1 as a guide.

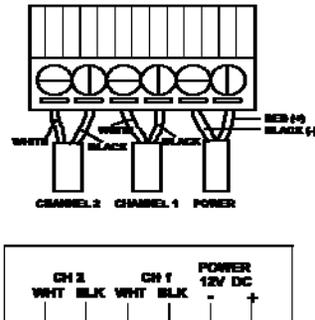


Figure 7-1. Meter connections

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.

- Review all of your installations and cable routings, looking for unnecessary loops, tight bends or kinks in the cables, properly inserted connectors, and connection of the trailer cable.
- Connect the battery end of the power cable to the batteries. **Use an inline fuseholder with a 3-amp slow-blow fuse.** Put the fuseholder and fuse in the red wire and next to the positive battery terminal.
- Make sure you are connecting to 12 volts and not 24 volts.**

**FINAL STEP**

- Position the meter plug for insertion into the back of the meter. Insure that the screws for the connector terminals are visible on the top side. That will position the red battery wire next to the edge of the meter case. Verify by looking at the label on the back of the meter.
- Insert the connector into the meter by gently pushing straight in.
- At the front of the meter, press the  key in the lower right-hand corner of the meter front panel. The information display, above the blue "soft keys", will first show **POWER ON** and then show the meter model and the software version. During this time, the meter is also performing an internal self-test which includes briefly lighting all of the small red indicator lights. If the information display shows any error messages, refer to the troubleshooting chapter at the end of the manual.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

---

**CHAPTER 8    MAINTENANCE****INTRODUCTION**

Proper maintenance of your PNT 9700 on-board weighing system, including preventive maintenance, is necessary to insure accurate and consistent weight readings. The best practice is to develop both daily and a weekly inspection procedures.

**DAILY INSPECTIONS**

1. Look at both the truck, trailer, and load cell cables to see if they are:
  - kinked
  - torn
  - cut or frayed
  - properly secured away from debris
2. Be sure the plug and socket in the trailer cable are free of dirt and grease.
3. Insure that the meter is still securely fastened at its mounting location and the connector is pushed all the way into the back of the meter.
4. Inspect the load cells and clean out any buildup of mud, snow and ice, rocks, or other debris from between the load cells and the truck or trailer frame.

**WEEKLY INSPECTIONS**

1. While looking at the truck, trailer, and load cell cables, run you hand along the cables to help detect any cuts or abrasions.
2. Verify that the connectors at the load cells and transmitters are still screwed in tight and the transmitters are still securely mounted.
3. Inspect the connector at the back of the meter, looking for loose or frayed wires.
4. Be sure the power cable is still securely connected at the battery, the connection is not showing signs of corrosion, and the insulation is not being worn through where it could cause a short to the truck frame.

---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

---

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 9 SPECIAL OPERATIONS

### INTRODUCTION

This chapter describes special features of the PNT9700 indicator.

The **WEIGHT-TO-GO** feature will instantaneously show how much weight must be loaded to reach maximum legal payload. The weight display will show how many more pounds or kilograms can be loaded. For example, assume your truck (channel 1) tare weight is 19,860 pounds and the maximum legal load is 50,000 pounds. The weight display would show 30,140 pounds for channel 1, which is what can be added. As the load is added to the truck, the weight display will decrease. When it shows 0, the truck is loaded to the maximum legal payload. The trailer (channel 2) would be similar.

The **ADVANCED SETUP** allows you to use load-cell transmitters other than the PNT9700 AccuLogic digitizer. If you have a trailer, for example, with the S1 load cells and transmitter, you can set the PNT9700 to accept their signals.

### ENTERING THE WEIGHT-TO-GO LIMITS

Before entering the weight-to-go limits, make sure the meter has been fully calibrated, meaning the empty weights and loaded weights have been entered and the accuracy of the calibration has been verified. Also, make sure the truck and trailer are empty and the trailer is on the ground with the meter connected.


The weight-to-go limits will be the maximum axle weights allowed for the truck (channel 1) and the trailer (channel 2). The numbers for the two limits will be entered separately in the same manner as entering the empty weights.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck.

1. Press the  key for 5 seconds until the information display shows




2. After releasing the  key, the information display will show



and the weight display will show



3. To enter the truck weight-to-go, press the  or  key until the information display shows



4. Press the  key.

The display will then show



5. The last number of the weight display will be flashing, telling you that number is ready to be changed.

To change the number's value, press the  or  key.

To select a different number, press the  or  key.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

6. When the number on the weight display matches your truck

(channel 1) weight-to-go limit, press the  key to store the weight in the meter's memory.

The information display will briefly show



and then return to




and the weight display will show



7. To enter the trailer weight-to-go,

press the  or  key until

the information display shows



8. Press the  key.

The display will then show



9. The last number of the weight display flashing, telling you that number is ready to be changed.

To change the number's value, press  or  the or key.

To select a different number, press the  or  key.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

10. When the number on the weight display matches your trailer

(channel 2) weight-to-go limit, press the  key to store the weight in the meter's memory.

The information display will briefly show



and then return to



and the weight display will show



11. At any time, you can exit the calibration process by pressing

 the key. The information display will briefly show



Do not use pencils or other sharp-pointed objects to press the meter's keys.

**SETTING FOR WEIGHT-TO-GO**

Look at which of the small red LED lamps is on at the left of the weight display, next to the NET or GROSS label. The following table shows in which mode the meter is set to operate:

Operating Mode	LED Lamps	
	Net	Gross
Net	On	Off
Gross	Off	On
Weight-to-go	Off	Off

The following steps will select WEIGHT-TO-GO:

1. Press the  key to get the 

If you do not continue with the operation within 15 seconds, the meter will reset to the normal

weighing mode and you will need to press the  key again.

2. The information display will show 

3. Press the  key again to show 

4. Press to select WEIGHT-TO-GO. The red NET and GROSS

 LED  lamps will be off.

5. You can press the  to exit the operation at any time.

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck


**SETTING THE TRANSMITTER MODEL**

The PNT9700 will work with the Structural Instrumentation SI-9100 and M-100 12-volt transmitters. Because all transmitters have different outputs, you will need to reset the **TARE WEIGHT** every time you change to a different transmitter model. You will also need to enter the **CAL FACTOR** for the new transmitter.


For example, you have one truck that you use with two different trailers. The truck uses the PNT9700 transmitter. One trailer has an SI-9100 transmitter and the other trailer has a PNT9700 transmitter. First set up the one that uses the SI-9100 transmitter. After calibrating the trailer and you have verified with a few loads that the system weighs correctly, record the **CAL FACTOR**. Do the same for the second trailer that uses the PNT9700 transmitter. Then, when you change trailers, you only need to enter the correct **CAL FACTOR**.

The following steps will guide you through changing channel 1 from the PNT9700 transmitter to the SI-9100 transmitter.

1. Press and hold the  key about 15 seconds until the information display shows 

After releasing the  key, the display will show 


2. Press the  or  key to select the transmitter menu. The display will show 

3. Press the  key to select the SI-9100 transmitter. The display will show 

Do not use pencils or other sharp-pointed objects to press the meter's keys.

4. When finished, press the  key to exit the **ADVANCED SETUP MENU**.

The information display will show




To change channel 2 from the PNT9700 transmitter to the SI-9100 transmitter, do the following:

1. Press and hold the  key about 15 seconds until the information display shows




After releasing the  key, the display will show



2. Press the  or  key to select the transmitter menu. The display will show




3. Press the  key to select the SI-9100 transmitter. The display will show



4. When finished, press the  key to exit the **ADVANCED SETUP MENU**.

The information display will show



Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

Do not use pencils or other sharp-pointed objects to press the meter's keys.

## CHAPTER 10 USING MULTIPLE TRAILERS

### INTRODUCTION

The PNT9700 indicator allows operators to use one truck with multiple trailers. Each trailer and its associated transmitter is assigned a unique ID number. When the ID number is entered into the PNT9700 indicator, the trailer is recognized by the indicator and the calibration of the trailer channel (channel 2) is adjusted to match that particular trailer.

Before the multiple-trailer feature is usable, it must be enabled through the **advanced setup** menu. This chapter will guide you through enabling the feature and then entering the trailer ID numbers. The ID number can be any number between 1 and 100.


### ENABLING THE CH-2 ID NUMBER

1. Press and hold the  key about

15 seconds until the information display shows




2. After releasing the  key, the display will show



3. Press the  or  key

to select **Enable Ch-2 ID**.  
The information display will show



4. If no change is desired, press the  key.


Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

## 56 USING MULTIPLE TRAILERS

If you want to enable the channel 2 ID feature for using multiple

trailers, press the  key.

The information display will show



5. When finished, press the  key to exit the **ADVANCED SETUP MENU**.

### SET CH-2 ID NUMBER


1. Press the  key to get the



If you do not continue with the operation within 15 seconds, the meter will reset to the normal

weighing mode and you will need to press the  key again.

2. The information display will show



3. Press the  key to change the channel 2 ID number to match

the trailer. Press the  key if no change is desired. The meter will return to normal operation.

Do not use pencils or other sharp-pointed objects to press the meter's keys.

If you pressed the  key, the information will show



- Only the last three numbers of the weight display will be turned on. The last number will be flashing, telling you that number is ready to be changed. To change the value of the number, press the  or  key.

To select another number, press the  or  key.

- When the number  on the weight display matches your trailer's ID number, press the key.

- At any time, you can exit the calibration process by pressing the  key.

The information display will briefly show



---

Unplug the connector from the back of the meter before jump-starting, battery-charging, or welding on the truck

